




PRODUCT SPECIFICATION: KM-1427-3

DIMENSIONS

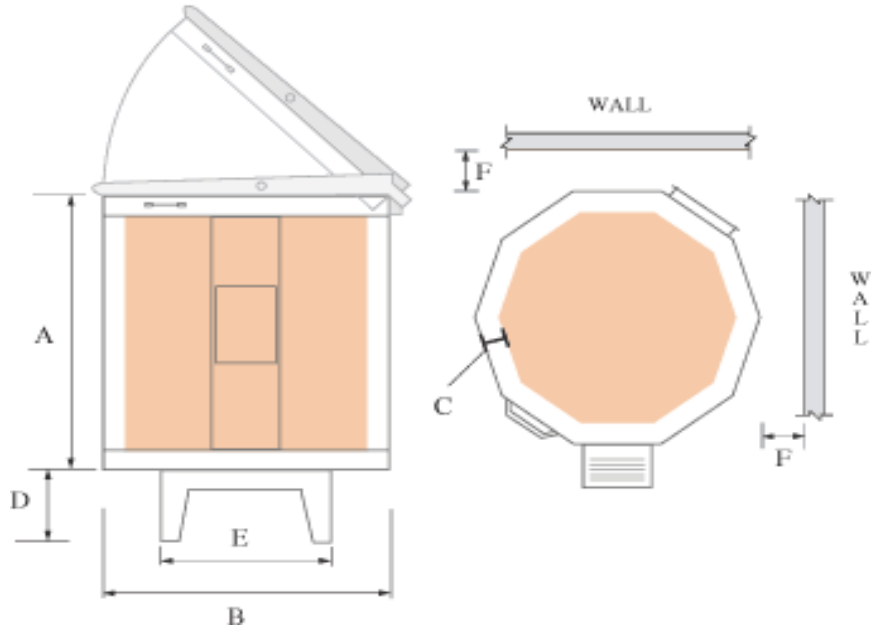

SPECIFICATIONS & DIMENSIONS

MODEL	Phase	Volts	Maximum (°C/ °F)		Chamber (cm/inches)			O.D.Dimensions (cm/inches)						Power		NEMA Recp. Conf.	BTU's
			Cone	Temp	Depth	Opening Width	Cu.Ft.	A	B	C	D	E	F	Amps	Watts		
KMT1427	1	240	10	2350	68.5	102	12.75	84	75	7.6	20.3		46	80	19000	Hardwired	29795
			10	4262	27	40	361L	33	29.5	3	8		18	80	19000		

OPTIONAL ACCESSORIES

ENVIROLINK	Optional
ENVIROVENT	Optional
LINKBOARD SERVICE 1 YEAR	
Optional LINKBOARD SERVICE 5	

CONTROLLER

Thermocouple: K Clock: 60 Mhz
 Voltage: 0 DC Relays
 Output: 0 Volts DC
 Fuse: 0 AMP

